

## Superior Dual-Lens Audiovisual System for Collaboration

# AVer VC550

4K Dual lens PTZ Conferencing Camera with Scalable Speakerphone for Mid to Large Rooms



## Product Specifications

### Dual Lens Camera (CAM550)

#### PTZ optical zoom lens

- Image sensor: Sony 4K EXMOR, crystal clear in any lighting
- Frame rates: (16:9) 4K 30fps; 1920 x 1080, 1600 x 900, 1280 x 720, 960 x 540, 848 x 480, 800 x 448, 640 x 360, at 60, 30, 15fps; (4:3) 1280 x 960, 800 x 600, 640 x 480 at 60, 30, 15fps
- 24\*X Zoom: 12X optical; 2X digital zoom
- Wide field of view: DFOV 85°; HFOV 76°; VFOV 46°
- Lens focal length: 3.9mm (wide) ~ 47.3mm (tele)
- Lens F#: 1.8 (wide) ~ 2.8 (tele)
- AE, white balance: auto, manual override via PTZApp 2
- Minimum focus distance: 1.5m
- Motorized Pan & tilt: Pan: ±170°; Tilt: +90° (up) -30° (down)
- Preset number: 10 via IR remote, 128 via RS232

#### Secondary fixed lens (AI lens)

- Image sensor: Sony 4K EXMOR
- Frame rates and resolution set according to PTZ lens settings
- Wide field of view: DFOV 95°; HFOV 78°; VFOV 50°

\*Please use PTZApp 2 to set up 24X zoom

\*Please don't put the CAM550 on the table. This will block the view of AI lens and the AI detection function will malfunction. The suggested installation height is 1.5m away from the floor.

### Speakerphone (FONE540)

- Wireless Bluetooth / USB Wired for PC
- Full duplex microphone array speakerphone
- Two omnidirectional microphones support 360° pickup
- Full duplex echo cancellation
- Advanced noise suppression
- Powerful wideband voice processing
- Speaker volume: adjustable to 90 dB SPL at 0.5 m
- 3.5 mm line-in (aux) cable connects BYOD smartphones or PCs to use as speakerphones
- Touch controls for volume adjustment, mute, phone input, call, and hang up
- Can bridge phone-in and USB into one call
- Kensington lock

### Innovative features

- Dynamic auto framing: secondary AI lens detects all participants, new participants trigger PTZ lens to dynamically re-frame all participants.
- Preset framing tracks both preset area and speaker\*
- Simultaneous 3-way output: USB, HDMI and IP connections
- Gesture control provides intuitive camera controls
- HDMI Picture in Picture (PIP) function
- Smart gallery\*\* function offers great visibility for individual participant in the meeting room
- Cableless access to meetings: Get rid of USB cable connections with AVer virtual USB streaming technology\*\*\* (One RJ45 cable transfers IP streaming to USB.)
- Audio tracking support: Integration with 3rd party ceiling microphone (Shure/Sennheiser) via AVer Preset Link\*\*\* function.

\*Make sure preset areas are within AI lens' view.

\*\*Smart gallery function will be available in Q2 2022 via FW update.

\*\*\*Please download PTZApp 2 to set up Smart gallery, USB virtual streaming and Preset Link functionality.

### Connectivity

#### Camera

- USB type-B 3.1 connector, backward compatible with USB 2.0
- 12V/2A DC jack power adapter
- Mini DIN9 for RS232 in & out connection (VISCA control panel and camera daisy-chain)
- IP (RJ45)
- HDMI

#### Speakerphone

- USB2.0 Micro USB connector
- 12V/5A DC jack power adapter
- LAN for IP remote access
- Expansion port (daisy-chain speakerphone or microphone)
- 3.5 mm phone-in jack
- 3.5 mm line out

## HDMI & PoE

- HDMI 1.3: 1080p 30fps/ 60fps
- PoE+: 802.3at

## Video Format

- YUV, YUY2, MJPEG
- Network video compression format: H.264, H.265
- Network protocol: RTSP, RTMP

## USB

- 3.1 Gen 1, backward compatible with USB 2.0
  - UVC 1.1 (USB video), UVC1.5\*
- \*UVC1.5 utilizes a different platform environment and requires a FW upgrade. Please contact technical support for more details.

## Control

### Camera

- IR remote control
- VISCA/pelco P/pelco D via RS232 (128 preset points via VISCA command)
- Remote side: VISCA over IP, IP (RJ45)
- UVC plug and play
- WebUI: Browser IP access via Chrome (Not support IE)
- OSD setting: HDMI out to TV monitor
- PTZApp2 Support

### Speakerphone

- UAC, plug and play
- WebUI: Browser IP access via Chrome (Not support IE)
- PTZApp 2 Support

## Power Supply

### Camera

- AC 100V–240V, 50/60 Hz; Consumption: 12V, 2A
- PoE+: 802.3at

### Speakerphone

- AC 100V to 240V, 50/60 Hz
- Consumption: 12V, 5A

## Free Applications for Meeting Collaboration (For Windows® and Mac® computers)

### EZManager 2: Camera Central Management Software

- Remotely group FW/SW upgrades, control the camera, and manage settings

### PTZApp 2: Camera Settings Software

- Smart gallery/Virtual USB streaming/Preset Link
- View live video, participant metrics, and meeting-interval information
- Enable Skype for Business far-end control
- Upgrade firmware automatically/manually
- Control the camera
- Set parameters and adjust the camera image
- View operation status, diagnose issues

### EZLive: Broadcasting Software

- Multi-camera real-time streaming, annotating, image capturing, and video recording

## Environment Data

- Operation temperature: 0 to 40°C
- Operation humidity: 20% to 80%
- Storage temperature: -20 to 60°C
- Storage humidity: 20% to 80%

## Dimensions

- Package dimensions: 348(L)\*251(W)\*308(H) mm
- Package weight: 7.9kg
- Camera: 170.8(L) x 190.5 (H) x 173(D) mm/ 2.1kg
- Speakerphone: 220(L)x 49.5(D) x 181.5(H) mm/ 0.8kg
- Remote control: 200 x 50 x 21mm/ 90g

## Package Contents

- CAM550 unit
- FONE540 unit
- Power adapter x2
- Power cord x2
- USB3.1 Type-B to Type-A cable (3 m) for camera
- Micro USB 2.0 to Type-A cable (5 m) for speakerphone
- Remote control
- Mini DIN9 to mini DIN8 RS232 adapter cable
- HDMI cable (3 m)
- 3.5 mm aux cable
- Wall mount bracket and screws
- QR code card
- Tripod screw

## Optional Accessories

- Mini DIN8 to D-Sub9 cable
- Ceiling mount\*
- Foldable TV mount
- USB 2.0 type-B Cable
- USB 3.1 Extension Cable (10 m/20 m/30 m)
- Expansion Speakerphone (10 m cable included, daisy-chain up to three speakerphones)
- Expansion Pair Microphone (Two 5 m cables included, daisy-chain up to four microphones)

\*CAM550 is a dual lens camera and doesn't support upside-down installation. For ceiling mounting, please see the AVer ceiling mount.

## Security and Mount

- Kensington lock
- 1/4" tripod mounting screw
- Camera wall-mount bracket included
- Optional foldable TV mount

## System Requirements

- Windows® 7/10/11
- Mac OS X 10.14 or later
- Chromebox 3 version 94.0.4606.114 or later

## Hardware Specs

- 3.2 GHz Intel® Core™ i5-4460 processor
- 4 GB RAM or more
- USB 3.1 port, backward compatible with USB 2.0

## Warranty

- Camera, Speakerphone: 3 years\*
- Accessories: 1 year

\*We offer an optional 2-year extended warranty in the European area. Please contact your local agency for details.

## Compatible Applications

Zoom, Microsoft® Teams, Skype, Skype for Business, Google Meet, RingCentral, BlueJeans, Intel® Unite™, Fuze, Adobe® Connect™, CyberLink U Meeting®, Cisco WebEx® GoToMeeting™, LiveOn, Microsoft® Lync™, TrueConf, V-Cube, Vidyo, vMix, WebRTC, Wirecast, XSplit

\*For 4K UHD support, please check system/hardware requirements with your software application provider.

\*\*Specifications may vary by country and are subject to change without notice.

Camera Front




- 1 PTZ lens: 12X optical zoom
- 2 IR sensor
- 3 AI lens
- 4 LED indicator

Camera Back



- 1 Kensington lock
- 2 HDMI out
- 3 USB 3.1 type-B
- 4 RS232 in/out
- 5 LAN for IP streaming and Power over Ethernet (PoE)
- 6 DC 12V

Speakerphone Back

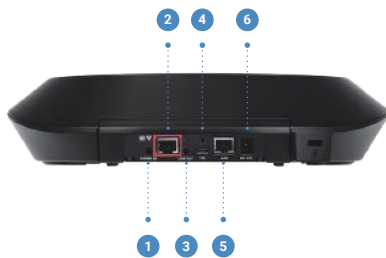

- 1 Phone in
- 2 Daisy-chain up to 3 speakerphones or 4 microphones
- 3 Line out
- 4 Micro USB 2.0
- 5 LAN for IP remote access
- 6 DC 12V