



Fanvil i60K Video Door Phone

Description

Fanvil i60K is a video door phone with a speed-dial button, a numeric keypad, and an IP65 rating for indoor and outdoor use. It supports various door-opening methods such as mobile App, BLE, DTMF code, IC cards and password for streamlined access management and is equipped with a 2 mega-pixel camera for audio and video communication. Compatible with SIP and ONVIF, it integrates with security systems and is ideal for villas, apartments, and communities.

Main Features



1 speed dial button



Equipped with a 2 mega-pixel HDR high-definition camera, it provides clearer imaging




IP65 high protection rating with wide temperature rate from -40°C to 70°C, suitable for harsh outdoor environments



Rich interfaces for security device connectivity



Support the standard ONVIF protocol, providing high flexibility and excellent compatibility

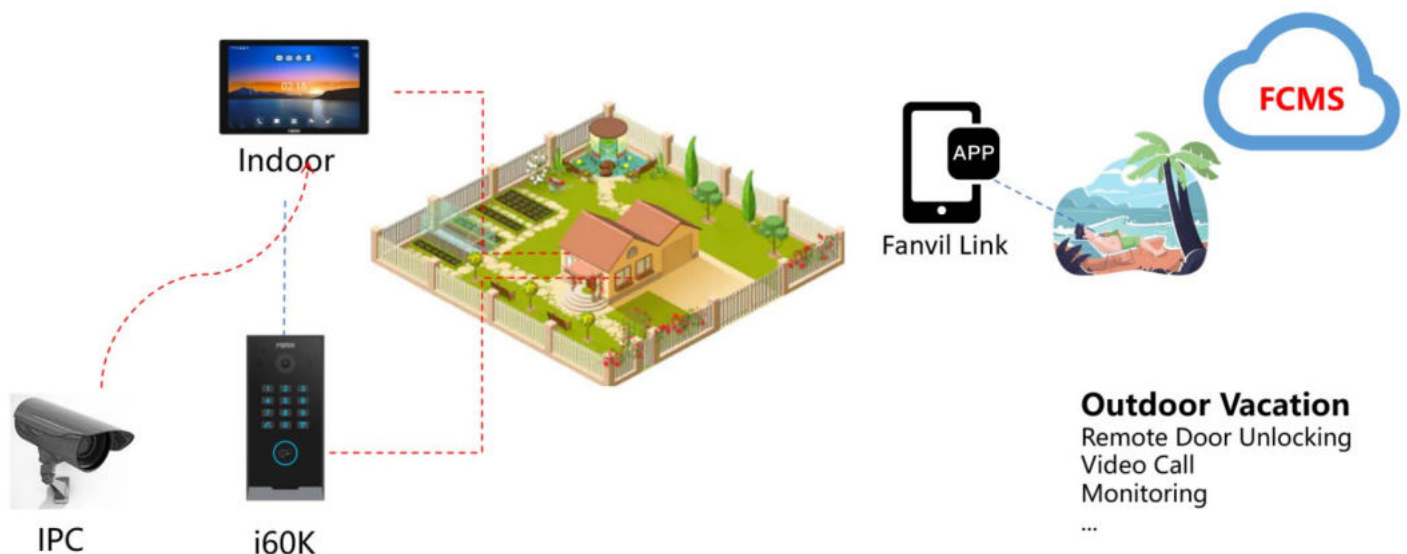

Specifications

| | |
|--------------------------------|--|
| Panel Type | Multi-apartment, Community, Villa |
| Keyboard | 1 Speed-dial Button and ten number keys |
| Body | ABS+PC |
| Colors | Panel: black, Housing: Gunmetal |
| Sensor | 1/2.9-inch, COMS |
| Camera | 2 Mpx, Support infrared |
| Viewing Angle | 140°(FOV) 100°(Horizontal) 57°(Vertical) |
| Output video | H.264 (Baseline, Main Profile) |
| Light Sensitivity | 0.1Lux (IR Supplement Light) |
| Card Storage | 1,0000 |
| Power Consumption | PoE:1.63~6.93W Adapter: 1.51~6.16W |
| Power Supply | DC 12V / 1A PoE 802.3af Class 3 |
| Working Temperature | -40°C~+70°C |
| Storage temperature | -40°C~+70°C |
| Size of the Panel (LWH) | 70.7*149.7*30mm |
| IP / IK Level | IP65 |
| Installation | Wall-mounted Rain cover |

Functional Capabilities

| | |
|------------------------------|--|
| Supported Protocols | SIP 2.0 over UDP/TCP/TLS |
| Lock Opening | DTMF, IC Card, Remote Door Opening, PIN Code, BLE, Indoor Switches |
| Interface | Wiegand Input/Output Short Circuit Input/Output |
| Supported Wiegand | 26, 34 bit |
| Supported ONVIF Types | Profile S |
| Supported Standards | DTMF, IC Card, Indoor Switch, BLE Cards 13.56 MHz |
| Talking Mode | Full duplex (High-definition Audio) |
| Additionally | Built-in relay, Motion detection, Tamper Alarm, TF Card, Open API |